Product leaflet

ProductModel No.Ordering No.Powered Air-Purifying Respirator (PAPR)SR 700H06-7021

Product Description

The SR 700 system is a belt mounted Powered Air-Purifying Respirator (PAPR) with tight fitting face pieces or loose fitting respirators that protects against particulates. It is designed to be used in oxygen sufficient and non-immediately dangerous to life and health (IDLH) environments. The SR 700 PAPR system functions as an alternative to Air Purifying Respirators (APR) in all situations for which these are recommended. This applies particularly to work that is hard, warm or of long-duration. The filtered air is supplied through a breathing hose to the tight fitting face pieces or loose fitting respirators. The above-atmospheric pressure then generated prevents pollutants from the surroundings from penetrating into the breathing zone.

The characteristics of the SR 700 are as follows:

The battery is of lithium-ion type 3.5 Ah • Charging time around 3 hours • Battery capacity indicator • Equipped with two particulate filters • Operating time of up to 8 hours • The same control is used for starting, stopping and selection of operating status • Display with symbols • Alarm with audible/visual signals if the air flow is obstructed • Equipped with automatic air flow control • Can be used together with full face mask.

Electronics ingress protection is approved in IP class IP67 according to IEC / EN 60529.

Technical specification

	SR 700	42 CFR part 84 Full facepiece	42 CFR part 84 Loose-fitting facepiece
Air flow, min/max	6.2 CFM (175 I/min) - 7.9 CFM (225 I/min)	4.1 CFM (115 l/min)	6.0 CFM (170 I/min)
Battery	14.4 V, 3.5 Ah	-	-
Operating times at 6.2 CFM / 7.9 CFM:			
P100 filter	8 h/5.5 h	≥ 4 h	≥ 4 h
Weight with P100 filter	≈ 39 Ounce (1.100 g)	-	-
Service temperature	14 to 131 °F (-10 to +55 °C), < 90 % RH	-	-
Storage temperature	4 to 104 °F (-20 to +40 °C), $<$ 90 % RH	-	-
Low flow warning level	6.2 CFM (175 I/min)	-	-
Protection factors ² : SR 580	1000	-	-
Protection factors1: SR 200	1000	-	-
Approvals	NIOSH 42 CFR part 84	-	-

¹⁾ Specified by OSHA and applies generally to all full facepieces and loose-fitting facepieces together with Powered Air-Purifying Respirator (PAPR) when the employer implements a continuing, effective respirator program as required by this section (29 CFR 1910.134)



Sundstrom Safety Inc.


143 Maple St. Warwick, RI 02888

www.srsafety.com

Office: 1-401-434-7300 Toll Free: 1-877-SUNDSTROM Fax: 1-401-434-8300 info@srsafety.com



²⁾ APF (Assigned Protection Factor) documented in third party studies, according to OSHA 29 CFR 1910.134 and 3352-02-2009.

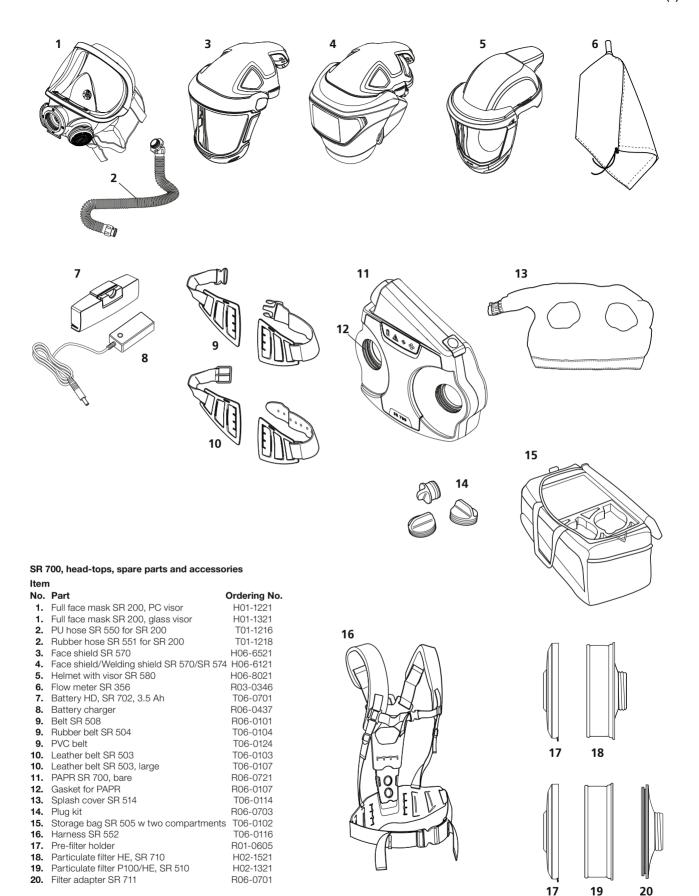

Sundstrom Safety Inc.

143 Maple St. Warwick, RI 02888

Office: 1-401-434-7300 Toll Free: 1-877-SUNDSTROM Fax: 1-401-434-8300

info@srsafety.com www.srsafety.com

